


手摇堆高车 >>> LS250 / LS500 / LS1000

Winch Stacker

- 高强度齿轮绞盘，提升有力、安全、可靠
- 结构刚性强，坚固耐用
- 多种附件选择，应用广泛
- High-strength gear wheel winch provides strong and safe lifting
- Durable Structure with strong rigid
- Widely used with Various optional accessories

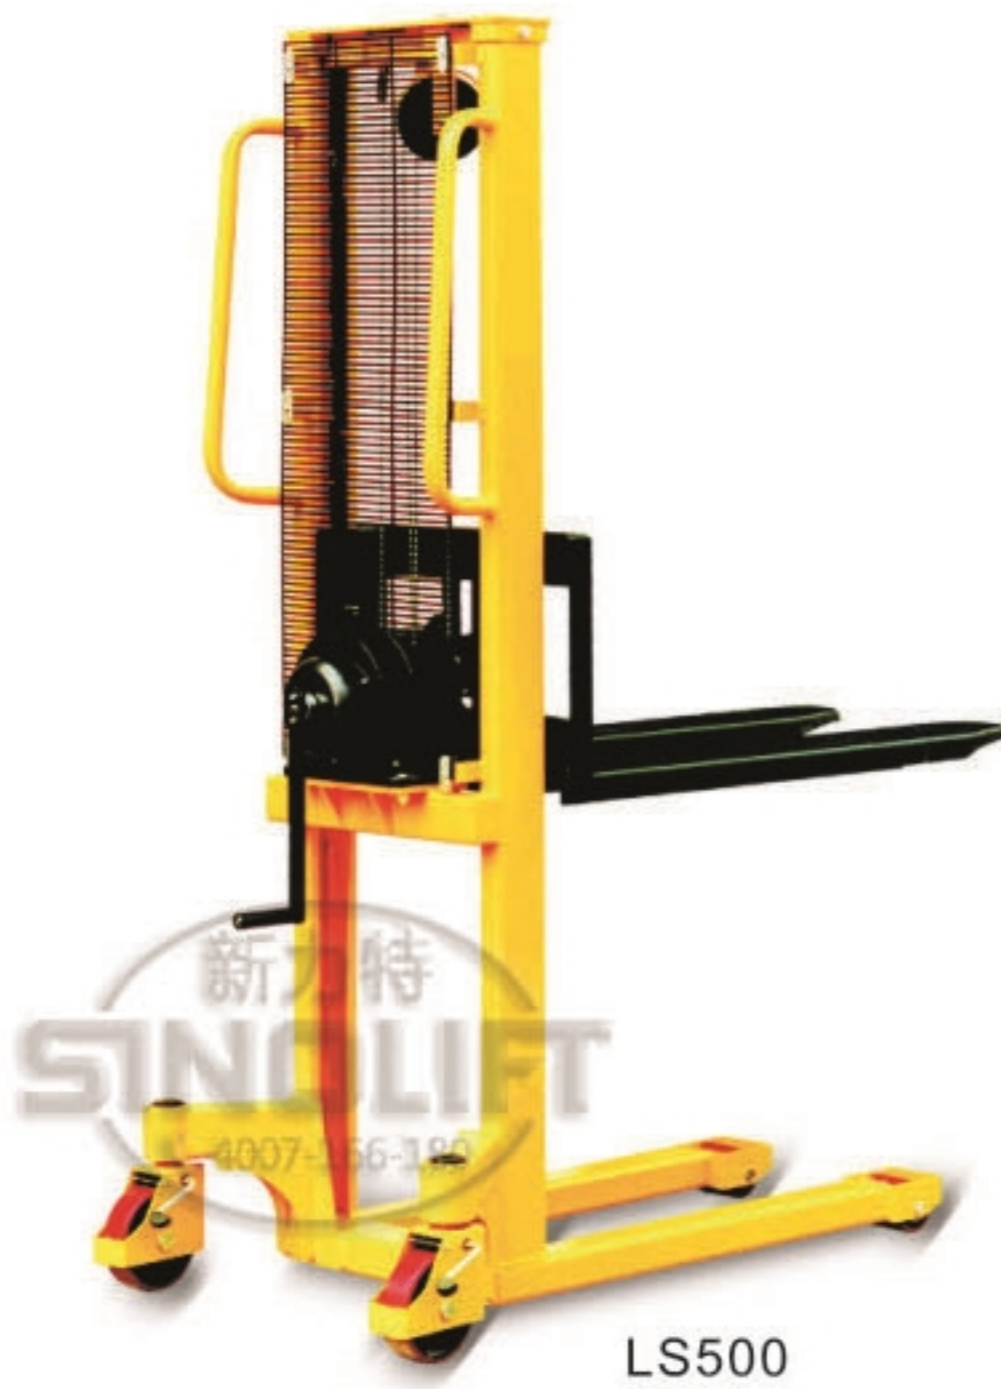

| 型号/Model | | LS250 | LS500 | LS1000 |
|------------------------------------|----|-------------------|-------------------|-------------------|
| 载重/Capacity | kg | 250 | 500 | 1000 |
| 载荷中心 / Load Centre | mm | 400 | 500 | 575 |
| 货叉最高升高/Max. Fork Height | mm | 1560 | 1560 | 1500 |
| 货叉最低高度/Min. Fork Height | mm | 90 | 90 | 80 |
| 货叉可调宽度/ Fork Adjustable Width | mm | 150~690 | 160~690 | 540固定/Fixed |
| 货叉尺寸/ Fork Size (L x W) | mm | 800 x 60 | 1000 x 70 | 1150 x 160 |
| 额定载重受力/ Effort Force to Rated Load | N | 100 | 120 | 100 |
| 工作次数 / Lifting Height per Stroke | | 40 | 22 | 9.5 |
| 离地间隙/Ground Clearance | mm | 18 | 18 | 24 |
| 最小转弯半径/ Min. Turning Radius | mm | 1075 | 1075 | 1250 |
| 前轮直径/ Front Wheel Diameter | mm | Φ80 x 47 | Φ80 x 47 | Φ80 x 94 |
| 后轮直径/ Rear Wheel Diameter | mm | Φ150 x 40 | Φ150 x 40 | Φ150 x 50 |
| 外形尺寸/ Overall Size (L x W x H) | kg | 1325 x 725 x 2030 | 1325 x 725 x 2030 | 1600 x 725 x 1930 |
| 净重/ Net Weight | kg | 140 | 146 | 182 |